


Transmitter – 2.4GHz Stryker Pro+

Model # LXL-24-PDL

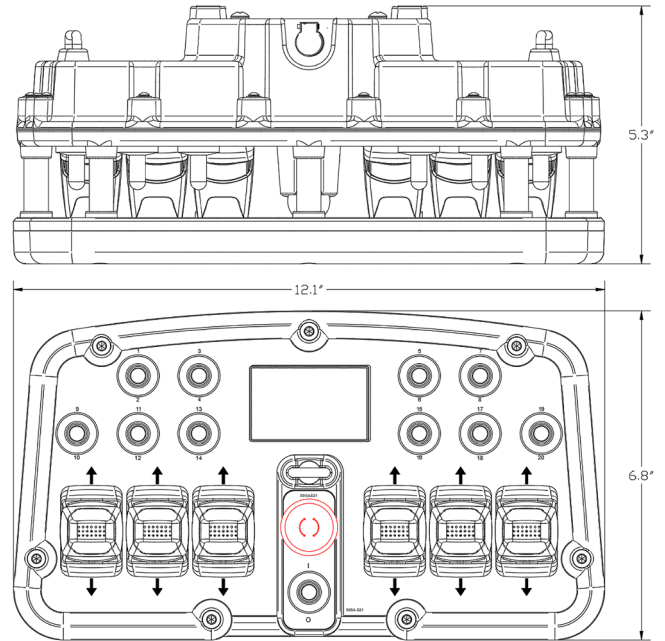

Receiver Options

- 2.4 GHz LXB –Outputs
- 2.4 GHz LXC –J1939 CAN Only

Applications

- Machine Control
- Construction Equipment
- Industrial Control System

GENERAL SPECIFICATIONS

Frequency Range	2400-2483.5 MHz
Frequency Control	42 Frequency Hopping Channels (Software Selectable)
Modulation	MSK
Security	Channelization, System ID, and Vendor ID
Operating Temp.	-20°C to 54°C (-4°F to 129°F) with Rechargeable Batteries
Humidity	Up to 90% RH, non-condensing

TRANSMITTER SPECIFICATIONS

Display	320 x 240 px Sunlight-Readable E-Ink Display
Battery Voltage	7 NiMH Re-chargeable Batteries-2000mAH
Supply Voltage	15-32 VDC; 1 A max
Max. Current Consumption	<200 mA (RF Active)
LED Outputs	4 Available (RF and Error)
Battery Life	15 hrs. Typical: Usage Dependent
Antenna	Internal
Dimensions	Approx. 12"x7"x5.5"
Weight	Approx. 4 Lbs.
Enclosure	IP 67

