
LXG Receiver

The LXG Series Receiver features four discrete outputs, LED feed back and a J1939 CAN (Controller Area Network) connection. With internal processing capabilities, these robust industrial remote control receivers can be programmed to fit any application.



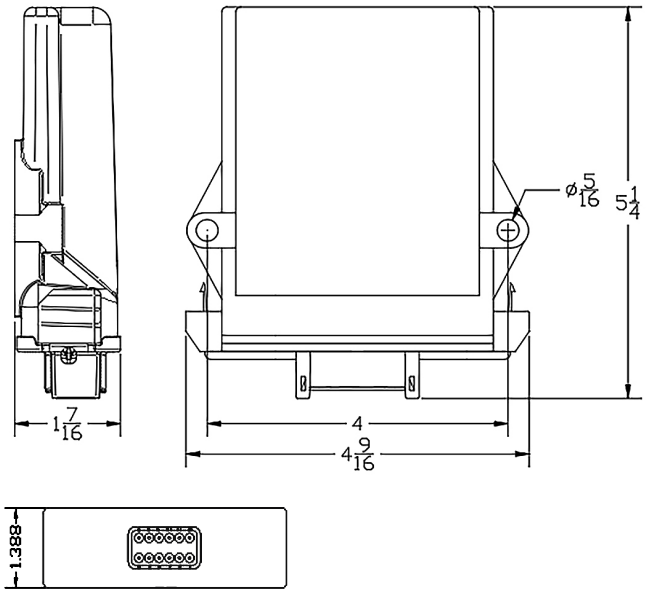

RECEIVER SPECIFICATIONS	
Supply Voltage	9—36 VDC
Digital Channel Outputs	4 Opto Isolated Relay
Output Ratings	500 mA
Output Diagnostics	LED feedback to indicate on/off status
CAN Connection	J1939 (2-Wire) - Optional DeviceNET, ModBUS, RS 485
Antenna	Internal/External
Dimensions	Approx. 4.75" × 4" × 1
Weight	Approx. 8 oz.
Ingress Protection	IP 68

2.4 GHZ GENERAL SPECIFICATIONS	
Frequency Range	ISM 2.4 GHz
Frequency Control	14 Frequency Hopping Channels (Software Selectable)
Modulation	DSSS (Direct Sequence Spread Spectrum)

900 MHZ GENERAL SPECIFICATIONS	
Frequency Range	ISM 900 MHz
Frequency Control	64 Frequency Hopping Channels (Software Selectable)
Modulation	DSSS (Direct Sequence Spread Spectrum)

800-569-9801 • info@evolutionmotion.com
evolutionmotion.com/products/lxg-receiver